

TEAC

New Product

Load Cell Signal Conditioner

TD-SC1

D/A

RS-485

UL US CE UK CA



The TD-SC1 is a thin, lightweight signal conditioner for strain gauge transducers. This converts a minute signal from a transducer into information required for control and outputs it.

In recent years, the introduction of IoT in production factories has accelerated rapidly. With the demand for improved productivity through centralized management, the load cell signal conditioner TD-SC1 series, which is equipped with various functions as standard and realizes high cost effectiveness, meets that need.

Thin and Lightweight

Compact design
(W30 x H85 x D110mm)
+ lightweight (210g)

Safety Standard

Compliant with CE & UKCA marking and UL standards that can be used worldwide

Fastest in Class

Sampling of 20,000 times/second by high-speed CPU

Easy and Convenient

Supports the plug-and-play function "TEDS" that automates calibration

Easy to Use

Setting by PC via USB connection (Available a simple calibration function on the main unit)

Maintenance

Load cell overload is notified by Status LED

Selectable Network

RS-485, CC-LINK*, EtherNet/IP™
*Supporting various fieldbuses
*Under planning.


<https://loadcell.jp/en>

Specifications

Bridge voltage	DC 5V / 10V ±10% (30mA current maximum, remote sense can be used)	
Signal input range	±5.0mV/V	
Equivalent Input /TEDS	Calibration range	0.05mV/V to 5.0mV/V
	Calibration precision	Within 0.1% F.S. (when using 1m standard TEAC Ø8, 6-core shielded cable with 350Ω impedance, 10V BV and 5mV/V setting)
Precision	Linearity	Within 0.01% F.S. +1 digit (when input is 5mV/V)
	Zero drift	Within 0.5μV/°C (Input conversion value)
	Gain drift	Within ±0.005% F.S./°C
A/D conversion	24-bit, 20000 times per second	
Digital filter	OFF/3/10/30/100/300/1000Hz (-6dB/oct)	
Moving average	OFF / 2 to 2048 times	
TEDS function	IEEE1451.4 class 2 mix mode interface / Loading, Rewriting, Restoring	
Display	Status display by LED on the front of the main unit	
Comparison function	Setting	HI, LO
	Setting range	-99999 to 99999
Hold function	Sampling, Peak, Bottom, Zone definition (Peak, Bottom)	
Control input/output signal	Input signal	Hold, Digital zero, Clear (Photocoupler Insulation)
	Output signal	Load judgment (HI/OK/LO), NPN open collector (Photocoupler Insulation)
	USB Serial	Main unit setting by dedicated application.
Output	TD-SC1 (D/A)	Voltage: 0 - ±10V Current: 4 - 20mA
	TD-SC1 (485)	A+, B- (Photocoupler Insulation), TRM, SG
	TD-SC1 (E/IP)	(TBD)
	TD-SC1 (CCL)	(TBD)
Power supply	Ratings: 24V DC ±10% 7W	
Operating temperature range	0°C to 40°C	
Storage temperature range	-20°C to 60°C	
Operating humidity range	85% RH or less (without condensation)	
Applicable standards	CE marking, UKCA marking, FCC (Class A), UL61010-1	
External dimensions (W×H×D)	Approx. 30 × 85 × 110mm (without protrusions)	
Weight	Approx. 210g	
How to install	Support for 35mm wide top hat type rails (DIN rail mounting)	
Options	AC adapter (AC100 to 240V, compliant to the safety standards of Japan and North America)	


Pin arrangement (common parts)

Terminal	Signal	Description
1	TEDS	TEDS memory signal
2	GND	TEDS memory signal ground
3	+EXC (A)	Excitation voltage +
4	+SENS (F)	Remote sense +
5	-SIG (B)	Input signal -
6	-EXC (C)	Excitation voltage -
7	-SENS (G)	Remote sense -
8	+SIG (D)	Input signal +
9	SHIELD (E)	FG
10	SHIELD (E)	FG
11	D/Z	Digital zero
12	HOLD	Hold start signals
13	CLEAR	Clearing the hold
14	Comparison judged HI	High limit judgment output
15	Comparison judged LO	Low limit judgment output
16	Comparison judged OK	OK judgment output
17	Power supply for control input signal (+)	Input +24V
18	Power supply for control input signal GND	Connect with 0V

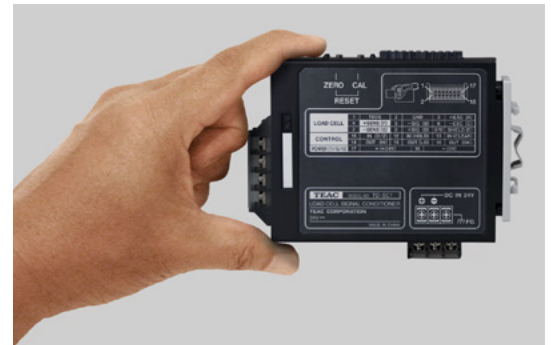

Dimensions

Unit: mm

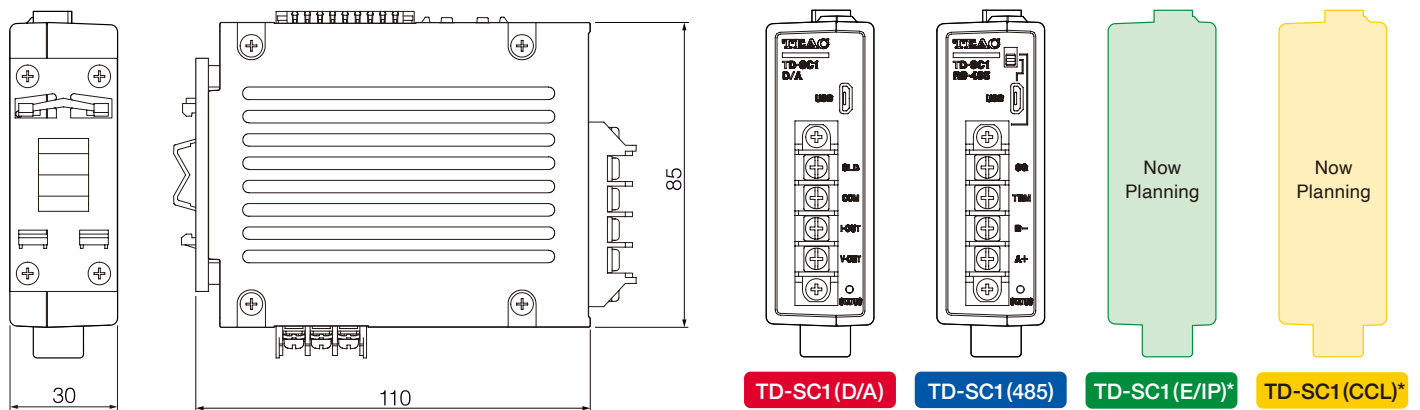

*Under planning

TEAC EUROPE GmbH.

Bahnstrasse 12, 65205
Wiesbaden-Erbenheim, Germany
Tel.: +49-(0)611-7158-651 Fax: +49-(0)611-7158-392
Email: info@teac.eu https://teac.eu/en/